


# SPINE SECONDO UNI EN 28736-93



l=	d=	Diameter (d)						
		6	8	10	12	16	20	
16		X						
20		X	X	X	X			
25		X	X	X	X	X		
30		X	X	X	X	X		
35		X	X	X	X	X	X	
40		X	X	X	X	X	X	
45		X	X	X	X	X	X	
50		X	X	X	X	X	X	
55		X	X	X	X	X	X	
60		X	X	X	X	X	X	
65		X	X	X	X	X	X	
70		X	X	X	X	X	X	
75		X	X	X	X	X	X	
80		X	X	X	X	X	X	
90		X	X	X	X	X	X	
100		X	X	X	X	X	X	
110		X	X	X	X	X	X	
120		X	X	X	X	X	X	
130		X	X	X	X	X		
140		X	X	X	X	X		
150		X	X	X	X	X		
160		X	X	X	X	X		
170		X	X	X	X	X		
180		X	X	X	X	X		
		X=	lunghezze unificate					
		X=	lunghezze speciali					

**MATERIALE 39NiCrMo3 Bonificato con R=95/105 Kg./mm2 e rugosita' Ra=0.8  
 IN ALTERNATIVA ALTRI MATERIALE AVP, AISI303, PR80**

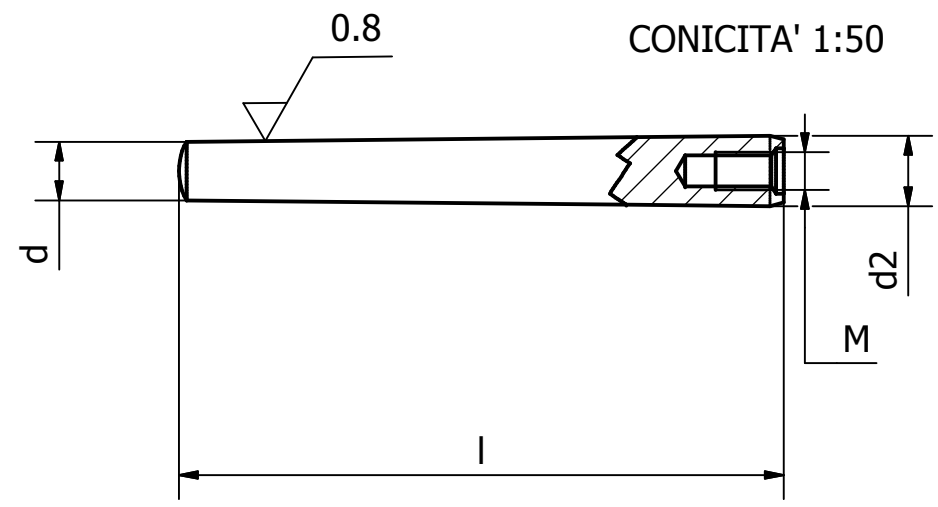